




Electroválvula Bidireccional BSP (Dicsa)

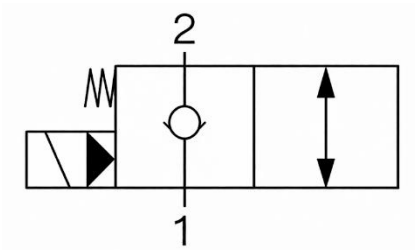

CODIGO	DESCRIPCION	THREAD	THREAD	VOLTAGE (V)	MAXIMUM FLOW
DIVB01	Val.Bid. N.C. 3/8"BSP 12VDC 40l/min	3/4"-16UNF-2A	3/8" BSP	12CC	40
DIVB02	Val.Bid. N.C. 3/8"BSP 24VDC 40l/min	3/4"-16UNF-2A	3/8" BSP	24CC	40
DIVB03	Val.Bid. N.C. 1/2"BSP 12VDC 60l/min	7/8"-14UNF-2A	1/2" BSP	12CC	60
DIVB04	Val.Bid. N.C. 1/2"BSP 24VDC 60l/min	7/8"-14UNF-2A	1/2" BSP	24CC	60
DIVB05	Val.Bid. N.C. 3/4"BSP 12VDC 150l/min	1"1/16-16UNF-2A	3/4" BSP	12CC	120
DIVB06	Val.Bid. N.C. 3/4"BSP 24VDC 150l/min	1"1/16-16UNF-2A	3/4" BSP	24CC	120

La información recogida en esta ficha (Catálogo) es de carácter orientativo y puede ser modificada o no sin previo aviso. UTECSA no se hace responsable de una correcta utilización del producto, salvo las referentes a defectos de fabricación.