




Conexión Flange FL (Cod.61) 45°

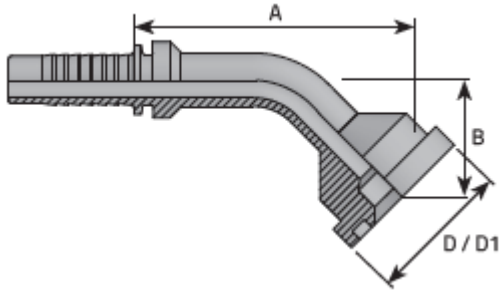

CODIGO	DESCRIPCION	D.N.	HOSE SIZE	DIAM	D	D1 MM	B MM	A MM	BAR	PSI
LAMFL3450808	Conexion 08-08FL6145 (FL3 45 1/2" 13)	-8	1/2"	12,8	1/2"	30,2	23	63	350	5076
LAMFL3451213	Conexion 08-12FL6145 (FL3 45 3/4" 13)	-8	1/2"	12,8	3/4"	38,1	28	68	350	5076
LAMFL3451216	Conexion 10-12FL6145 (FL3 45 3/4" 16)	-10	5/8"	16	5/8 "	34	30	63	350	5076
LAMFL3451219	Conexion 12-12FL6145 (FL3 45 3/4" 19)	-12	3/4"	19	3/4"	38,1	32	67	350	5076
LAMFL3451625	Conexion 16-16FL6145 (FL3 45 1" 25)	-16	1"	25,4	1"	44,5	35	70	350	5076
LAMFL3452025	Conexion 16-20FL6145 (FL3 45 1"1/4 25)	-16	1"	25,4	1.1/4"	50,8	36	90	280	4061
LAMFL3452032	Conexion 20-20FL6145 (FL3 45 1"1/4 32)	-20	1.1/4"	31,8	1.1/4"	50,8	43	100	210	3046
LAMFL3452432	Conexion 20-24FL6145 (FL3 45 1"1/2 32)	-20	1.1/4"	31,8	1.1/2"	60,3	44	101	210	3046
LAMFL3452438	Conexion 24-24FL6145 (FL3 45 1"1/2 38)	-24	1.1/2"	38,1	1.1/2"	60,3	41	112	185	2683
LAMFL3453238	Conexion 24-32FL6145 (FL3 45 2" 38)	-24	1.1/2"	38,1	2"	71,4	52	123	185	2683
LAMFL3453251	Conexion 32-32FL6145 (FL3 45 2" 51)	-32	2"	50,8	2"	71,4	59	148	170	2466

La información recogida en esta ficha (Catálogo) es de carácter orientativo y puede ser modificada o no sin previo aviso. UTECSA no se hace responsable de una correcta utilización del producto, salvo las referentes a defectos de fabricación.