




Conexión Hembra BSP (Cono 60°) 45°

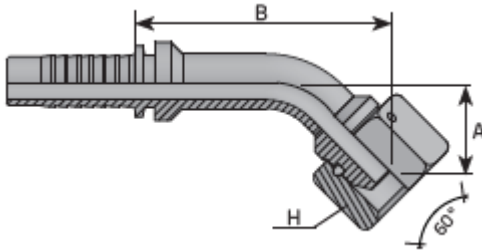

CODIGO	DESCRIPCION	D.N.	HOSE SIZE	DIAM MM	T INCH	t/1"	H MM	A MM	B MM	BAR	PSI
LAMDKR450406	Conexion 04-04FBS45 (DKR 45 1/4" 06)	-4	1/4"	6,4	1/4"	19	19	17	40	450	6526
LAMDKR450408	Conexion 05-04FBS45 (DKR 45 1/4" 08)	-5	5/16"	7,9	1/4"	19	19	20	51	350	5076
LAMDKR450606	Conexion 04-06FBS45 (DKR 45 3/8" 06)	-4	1/4"	6,4	3/8"	19	22	20	43	450	6526
LAMDKR450608	Conexion 05-06FBS45 (DKR 45 3/8" 08)	-5	5/16"	7,9	3/8"	19	22	21	52	350	5076
LAMDKR450610	Conexion 06-06FBS45 (DKR 45 3/8" 10)	-6	3/8"	9,5	3/8"	19	22	20	55	450	6526
LAMDKR450810	Conexion 06-08FBS45 (DKR 45 1/2" 10)	-6	3/8"	9,5	1/2"	14	27	23	58	450	6526
LAMDKR450813	Conexion 08-08FBS45 (DKR 45 1/2" 13)	-8	1/2"	12,8	1/2"	14	27	23	65	415	6019
LAMDKR451219	Conexion 12-12FBS45 (DKR 45 3/4" 19)	-12	3/4"	19	3/4"	14	32	29	63	350	5076
LAMDKR451619	Conexion 12-16FBS45 (DKR 45 1" 19)	-12	3/4"	19	1"	11	38	31	65	350	5076
LAMDKR451625	Conexion 16-16FBS45 (DKR 45 1" 25)	-16	1"	25,4	1"	11	38	41	90	280	4061
LAMDKR452032	Conexion 20-20FBS45 (DKR 45 1 1/4" 32)	-20	1.1/4"	31,8	1.1/4"	11	50	44	102	210	3046
LAMDKR452438	Conexion 24-24FBS45 (DKR 45 1 1/2" 38)	-24	1.1/2"	38,1	1.1/2"	11	55	45	118	185	2683

La información recogida en esta ficha (Catálogo) es de carácter orientativo y puede ser modificada o no sin previo aviso. UTECSA no se hace responsable de una correcta utilización del producto, salvo las referentes a defectos de fabricación.